




## K-FLEX 2500 C H.F

Description : EMC-compliant, Halogen Free Shielded Power supply and Control Cable with colour code cores.  
 Design:

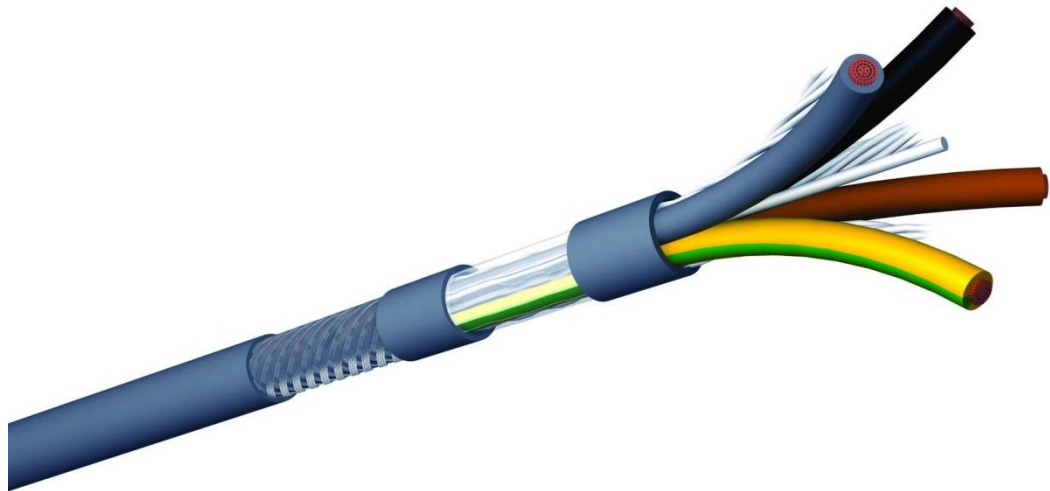

Construction : Flexible bare copper conductors according to CEI 20-29 Class 5 and DIN-VDE 0295 K5  
 Halogen free insulation compound type **TI6** according to HD 21.14 S1 annex A  
 Polyester Tape  
 Tinned copper wires braiding with coverage 85%  
 Halogen free jacket compound type **TM7** according to HD 21.14 S1 annex B

Manufacturing's Controls: Test and Control according to our certificated **ISO 9001-2015 CSQ-IMQ (EQ-NET)** Quality System procedure.  
 Labor tests reports are stored in our internal Q.C. laboratory archive together with the production reports

Norms: Self extinguish according to test method B IEC 60332-1  
 Flame-resistant according to IEC 60 332.3  
 The cable is conform to Low Voltage Directive (LVD) 2014/35/EU CE

Technical dates :

- Nominal voltage : 450/750V  
600/1000 V. from 10 mm<sup>2</sup>
- Spark Test voltage : 6000 V
- Working temperature : -40°C to + 70°C
- Minimum bending radius : approx. 12,5 x Ø

Use : Environmentally friendly, EMC-compliant, halogen-free Power and Control Cable especially for electrical equipment and installations in industrial environments, dry or damp interiors. Suitable for fixed installation under medium mechanical load conditions as well as for flexing application at free, non-continuously recurring movement without tensile load or compulsory guidance. Outdoor use with UV-protection only, considering the temperature range.  
 Particularly suitable where human and animal life as well as valuable property are exposed to high risk of fire hazards.