




## K-PLUS 2000 P

**Description :** High mechanical resistance Multi cores power supply and control cable with special PVC insulation and PUR jacket, working voltage 450/750 V.

**Design:**

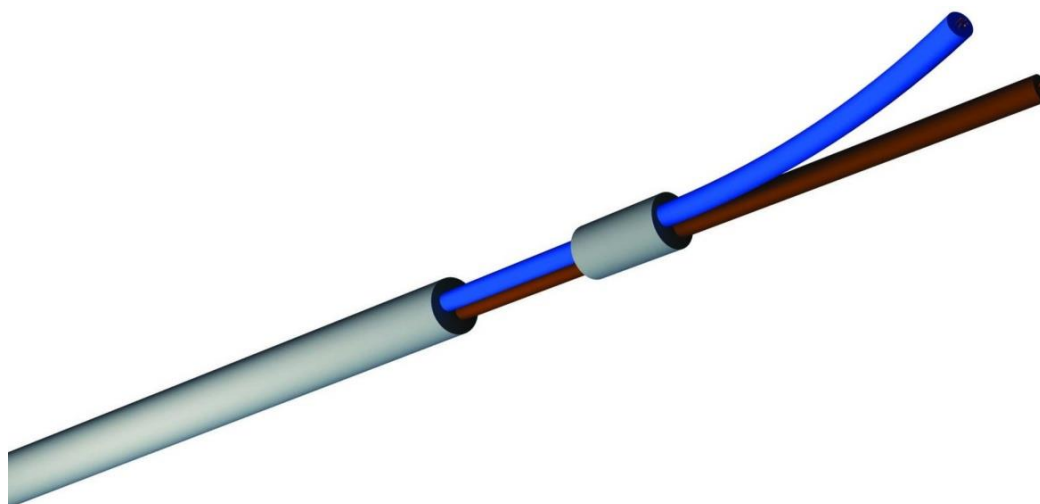

**Construction :** Flexible bare copper conductors according to CEI 20-29 Class 5 and DIN-VDE 0295 K5 PVC Insulation compound type **TI1** according to CEI 20-11 and VDE 0207 with special mechanical resistance. Colour code as per VDE 0293  
 Special PUR outer sheath

**Manufacturing's Controls:** Test and Control according to our certificated **ISO 9001-2015 CSQ-IMQ (EQ-NET)** Quality System procedure.  
 Labor tests reports are stored in our internal Q.C. laboratory archive together with the production reports

**Norms :** Flame retardant, Test method B according to DIN VDE 0472 part 804 and IEC 60332-1  
 The cable is conform to Low Voltage Directive (LVD) 2014/35/EU CE

|                          |  |
|--------------------------|--|
| <b>Technical dates :</b> | <ul style="list-style-type: none"> <li>• Nominal voltage : 450/750V</li> <li>• Spark Test voltage : 4000 V</li> <li>• Working temperature : Occasional flexing: -5°C to +70°C<br/>Fixed installation: -40°C to +80°C</li> <li>• Minimum bending radius Flexible use: 12.5 x outer Ø<br/>Fixed installation: 4 x outer Ø</li> </ul> |
|--------------------------|--|

**Use :** K-PLUS 2000 P can be used wherever cables are exposed to wear and tear under extreme conditions. Can only be used outdoors if the temperature range is observed.  
 For free, non-recurring movement without tensile load or compulsory guidance.  
 Resistant against almost all mineral oils and very resistant against wear and tear because of high abrasion resistance.  
 Manufactured free of substances harmful to lacquer (LB-free / silicone free) and is therefore suitable for use in lacquering shops