




K-FLEX 3500 C H.F O.R

Description : Oil Resistant, EMC-compliant Halogen Free Control Cable with numbered cores Low space requirement due to small cable diameter.

Design:

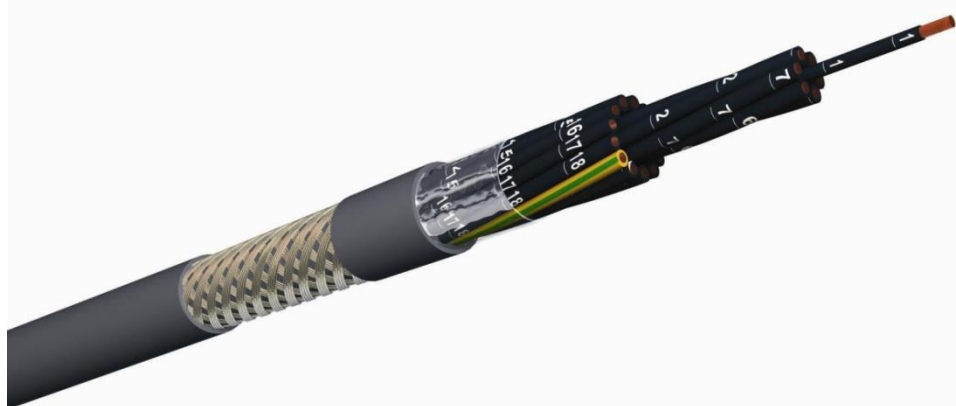

Construction : Flexible bare copper conductors according to CEI 20-29 Class 5 and DIN-VDE0295 K5
 Halogen free insulation compound type **TI6** according to HD 21.14 S1 annex A
 Black numbered cores with or without green yellow core
 Tinned copper screen with coverage 85% over polyester tape
 Oil Resistant Halogen free jacket compound type **TM7** according to HD 21.14 S1 annex B

Manufacturing's Controls: Test and Control according to our certificated **ISO 9001-2015 CSQ-IMQ (EQ-NET)** Quality System procedure.
 Labor tests reports are stored in our internal Q.C. laboratory archive together with the production reports

Norms: Flame-retardant according to IEC 60332-1-2 (flame spread on a single cable)
 No flame-propagation according to IEC 60332-3-24 respectively IEC 60332-3-25 (Flame spread on vertical cable or wire bundle)
 Halogen-free according to IEC 60754-1 (amount of halogen acid gas)
 Corrosiveness of combustion gases according to IEC 60754-2 (degree of acidity)
 Low smoke density according to IEC 61034
 Oil resistant according to SEV TB 20 B and EN 60811
 The cable is conform to Low Voltage Directive (LVD) 2014/35/EU CE

Technical dates :

- Nominal voltage : 300/500V
- Spark Test voltage : 3000 V
- Working temperature : Occasional flexing: -15°C to +70°C
 Fixed installation: -40°C to +70°C
- Minimum bending radius Occasional flexing: 20 x outer Ø
 Fixed installation: 6 x outer Ø

Use : Environmentally friendly, halogen-free Control Cable especially in industrial and/or EMC-critical environments.
 Suitable for fixed installation under medium mechanical load conditions as well as for flexing application at free, non-continuously recurring movement without tensile load or compulsory guidance. Outdoor use with UV-protection only, considering the temperature range. Not for direct burial. Particularly where human and animal life as well as valuable property are exposed to high risk of fire hazards.